



---

# SEAMLESS

---

THIN PORCELAIN PANELS BY SPECIALTY TILE

---

Beautiful  
SPACES  
NEED GREAT  
RESOURCES

## SEAMLESS SLAB SPECIFICATION

Contemporary designs soar when there are no barriers. Technological obstacles of the past have been eliminated, giving designers the freedom to create seamlessly with thin porcelain panels, so that your design is uninterrupted. Because scale matters.

Thin porcelain panels can be used in a variety of applications, including exterior cladding, walls, floors, over existing tile, on countertops and furniture. With so many options, we can provide technical assistance with a specification that is customized for your project.

### **Tips for specifying slabs:**

- **Plan for your seams:** Whenever possible, it is ideal to build to suit the size of the slabs. With a variety of slab sizes ranging up to 126", it's easy to find a size that is a good match for the dimensions of your project. They can be installed horizontally or vertically, so consider your options to minimize waste. Although priced by the square foot, slabs are sold as full slabs, so it's best to consider a design that will get the most use of each slab. If you are carrying over graphics from one slab to another, ensure your cuts won't interrupt the graphics.
- **Plan for the size of the slab in relation to the room:** Even though your wall is the right size, is your room? If you cannot carry in a slab through a doorway and manage to turn it around in the room, or if the elevator to a job site doesn't fit a slab, a redesign with a smaller slab size might be the best option.
- **Plan for your fabrication:** Fabrication costs can range significantly from project to project. Corners, outlets, and custom build-outs are typically add-ons, so ensure that they are planned for. Consider using Schluter edge profiles wherever feasible to save on fabrication costs.
- **Specify the right setting materials:** We can assist you in writing a spec for the correct allied products for your project.

*Testing data is relevant to the application and varies by color. We can provide data upon request.*

# TABLE OF CONTENTS

---

I CLASSICI - STATUARIO	5
I CLASSICI - CALACATTA GOLD	7
ETOILE - CREME	9
ETOILE - RENOIR	11
ETOILE - SYMPHONIE	13
ETOILE - ILLUSION	15
B&W - BREACH	17
CERIM - ROCK SALT WHITE GOLD	19
REX- HERITAGE LUXE AZURE	21
PREXIOUS - CHARMING AMBER	23
PREXIOUS - THUNDER NIGHT	25
STONES 2.0 - SAHARA NOIR	27
REVES DE REX - BLEU	29
REVES DE REX - PERLE	31
ORIGINES DE REX - DOREE	33
FLOWTECH	35
BERNINI CLASSICO	37
BERNINI ORO	39
CARRARA ZEBRINO	41
PLATINUM GREY	43
TAJ MAHAL	45
WHITE STATUARIO	47
CALACATTA ORO	49
STATUARIO VERO	51
BIANCO CARRARA	53
SIERRA GREY	55
PEAK WHITE	57
INSTALLATION - LATICRETE	58
INSTALLATION - MAPEI	59



# I CLASSICI STATUARIO




**STOCKED ITEM:** 47 1/4" x 110 1/4"

**FINISH:** Glossy

**THICKNESS:** 6mm

## OPEN BOOK A+B

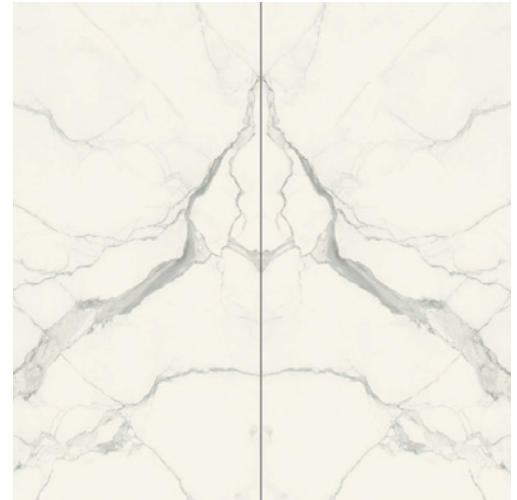

**A**

**B**

**STOCKED ITEM:** 63" x 126"

**FINISH:** Glossy

**THICKNESS:** 6mm

*Bookmatch only available in 63" x 126"*

## SPECIAL ORDER ITEMS

63" x 126"

63" x 63"

47 1/4" x 110 1/2"

47 1/4" x 94 1/4"

47 1/4" x 47 1/2"

23 5/8" x 47 1/4"

**Thickness 6mm**  
**FINISH: GLOSSY/SOFT**


*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) SOFT</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>≤ 0.5%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>GA-GLB</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>≥ 700 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>CL. 4</b> ISO 10545-7
--------------------------------------------------------------------------------------------------	-----------------------------------------------------------	---------------------------------------------------------	-------------------------------------------------------------	-------------------------------------------------------------	-----------------------------------------------------------	-----------------------------------------------------------



# I CLASSICI CALACATTA GOLD

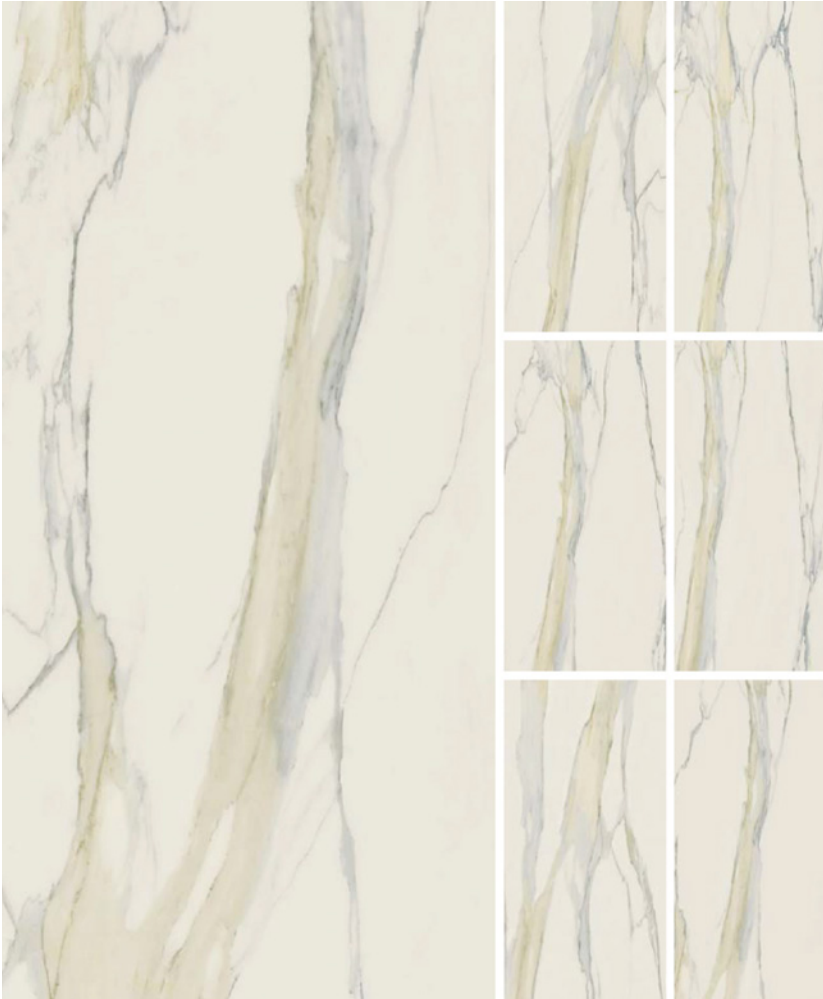

**STOCKED ITEM:** 47 1/4" x 110 1/4"

**FINISH:** Glossy

**THICKNESS:** 6mm

## OPEN BOOK A+B



**A**

**B**

**STOCKED ITEM:** 63" x 126"

**FINISH:** Glossy

**THICKNESS:** 6mm

*Bookmatch only available in 63" x 126"*

## SPECIAL ORDER ITEMS

63" x 126"

63" x 63"

47 1/4" x 110 1/2"

47 1/4" x 94 1/4"

47 1/4" x 47 1/2"

23 5/8" x 47 1/4"

**Thickness 6mm**  
**FINISH: GLOSSY/SOFT**

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>≤ 0.5%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>GA-GLB</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>≥ 700 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>CL. 4</b> ISO 10545-7
--------------------------------------------------------------------------------------------------	------------------------------------------------------------	---------------------------------------------------------	-------------------------------------------------------------	-------------------------------------------------------------	-----------------------------------------------------------	-----------------------------------------------------------





# ETOILE CREME

Coordinating 10mm

**STOCKED ITEM: 24" x 24"**

**FINISH: Glossy & Matte**



**STOCKED ITEM: 47 1/4" x 110 1/4"**

**FINISH: Glossy**

**THICKNESS: 6mm**

## SPECIAL ORDER ITEMS

**47 1/4" x 110 1/4"**

**47 1/4" x 94 1/4"**

**47 1/4" x 47 1/2"**

**23 5/8" x 47 1/4"**

**Thickness 6mm**

**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

**V3**



D.C.O.F. (WET)  
MATTE

**≥ 0.42**

ANSI 137.1

WATER  
ABSORPTION

**< 0.5%**

ISO 10545-3

CHEMICAL  
RESISTANCE

**GA-GLA-GLB**

ISO 10545-13

FROST  
RESISTANCE

**RESISTANT**

ISO 10545-12

BREAKING  
STRENGTH

**50 N/mm<sup>2</sup>**

ISO 10545-4

ABRASION  
RESISTANCE

**CL. 4**

ISO 10545-7



# ETOILE RENOIR

Coordinating 10mm

**STOCKED ITEM: 24" x 24"**

**FINISH:** Glossy & Matte



**STOCKED ITEM: 47 1/4" x 110 1/4"**

**FINISH:** Glossy

**THICKNESS:** 6mm

## SPECIAL ORDER ITEMS

**47 1/4" x 110 1/4"**

**47 1/4" x 94 1/4"**

**47 1/4" x 47 1/2"**

**23 5/8" x 47 1/4"**

**Thickness 6mm**

**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

**V3**



D.C.O.F. (WET)  
MATTE

**≥ 0.42**

ANSI 137.1

WATER  
ABSORPTION

**< 0.5%**

ISO 10545-3

CHEMICAL  
RESISTANCE

**GA-GLA-GLB**

ISO 10545-13

FROST  
RESISTANCE

**RESISTANT**

ISO 10545-12

BREAKING  
STRENGTH

**50 N/mm<sup>2</sup>**

ISO 10545-4

ABRASION  
RESISTANCE

**CL. 4**

ISO 10545-7



# ETOILE SYMPHONIE

---



**STOCKED ITEM:** 47 1/4" x 94 1/2"

**FINISH:** Glossy

**THICKNESS:** 6mm

## SPECIAL ORDER ITEMS

47 1/4" x 94 1/4"

47 1/4" x 47 1/4"

23" x 47"

Thickness 6mm

FINISH: GLOSSY/MATTE

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

---

**V3**



D.C.O.F. (WET)  
MATTE

≥ 0.42

ANSI 137.1

WATER  
ABSORPTION

< 0.5%

ISO 10545-3

CHEMICAL  
RESISTANCE

**GA-GLA-GLB**

ISO 10545-13

FROST  
RESISTANCE

**RESISTANT**

ISO 10545-12

BREAKING  
STRENGTH

**50 N/mm<sup>2</sup>**

ISO 10545-4


ABRASION  
RESISTANCE

**CL. 4**

ISO 10545-7



# ETOILE ILLUSION

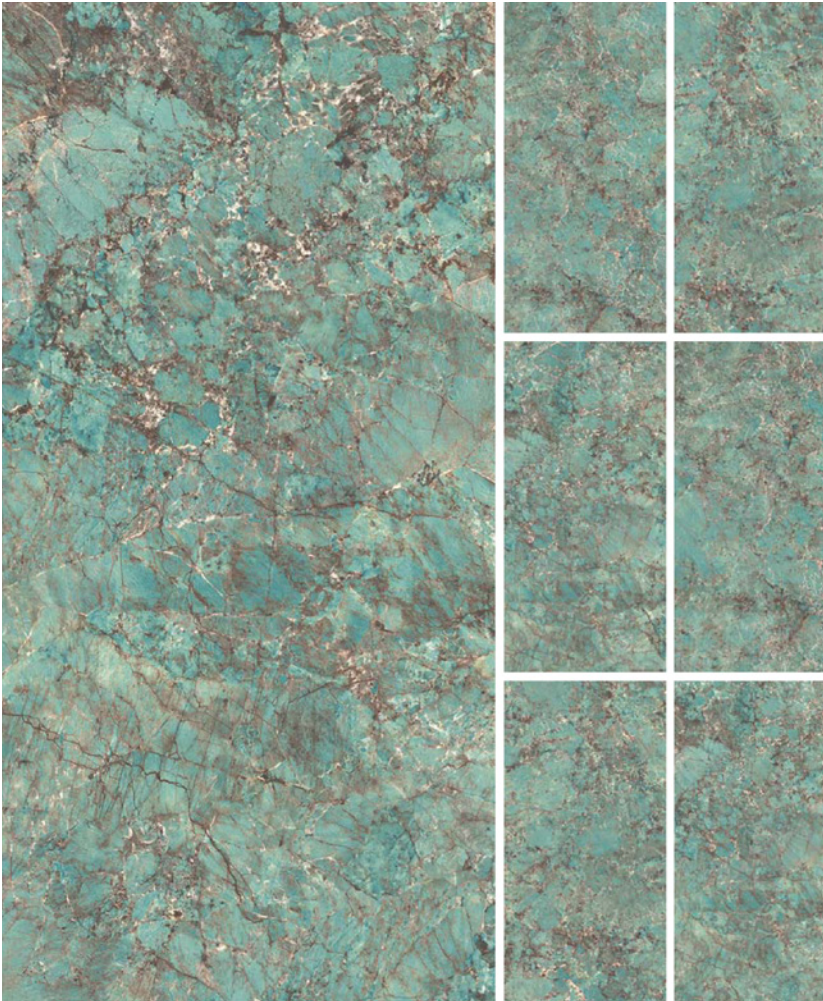

**STOCKED ITEM:** 47 1/4" x 94 1/2"

**FINISH:** Glossy

**THICKNESS:** 6mm

## SPECIAL ORDER ITEMS

47 1/4" x 94 1/4"

47 1/4" x 47 1/4"

23" x 47"

Thickness 6mm

FINISH: GLOSSY/MATTE

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

<b>V3</b> 	D.C.O.F. (WET) MATTE <b>≥ 0.42</b> ANSI 137.1	WATER ABSORPTION <b>&lt; 0.5%</b> ISO 10545-3	CHEMICAL RESISTANCE <b>GA-GLA-GLB</b> ISO 10545-13	FROST RESISTANCE <b>RESISTANT</b> ISO 10545-12	BREAKING STRENGTH <b>50 N/mm<sup>2</sup></b> ISO 10545-4	ABRASION RESISTANCE <b>CL. 4</b> ISO 10545-7
---------------	--------------------------------------------------------	--------------------------------------------------------	-------------------------------------------------------------	---------------------------------------------------------	-------------------------------------------------------------------	-------------------------------------------------------





# B&W BREACH

Coordinating 10mm

**STOCKED ITEM: 24" x 48"**

**FINISH:** Glossy & Matte



**STOCKED ITEM: 47 1/4" x 110 1/4"**

**FINISH:** Glossy

**THICKNESS:** 6mm

## SPECIAL ORDER ITEMS

63" x 126"

47 1/4" x 110 1/4"

47 1/4" x 94 1/2"

47 1/4" x 47 1/4"

23 5/8" x 47 1/4"

Thickness 6mm

**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

**V3**



D.C.O.F. (WET)  
MATTE

≥ 0.42

ANSI 137.1

WATER  
ABSORPTION

< 0.5%

ISO 10545-3

CHEMICAL  
RESISTANCE

**UA-ULA-ULB**

ISO 10545-13

FROST  
RESISTANCE

**RESISTANT**

ISO 10545-12

BREAKING  
STRENGTH

**3200 N**

ISO 10545-4

ABRASION  
RESISTANCE

**CL. 4 - CL. 5**

ISO 10545-7



WORK  
AND  
FUN

# ROCK SALT WHITE GOLD



Coordinating 10mm

**STOCKED ITEM: 24" x 48"**  
**FINISH: Natural**

**STOCKED ITEM: 12" x 24"**  
**FINISH: Natural**

**STOCKED ITEM: 1" x 1" Mosaic**  
**FINISH: Natural**

**STOCKED ITEM: 48" x 95"**

**FINISH:** Glossy

**THICKNESS:** 6mm

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>0.08%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>GA GLB GLA</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>1350 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>CL. 3 - CL. 5</b> ISO 10545-12
---------------	----------------------------------------------------------------	------------------------------------------------------------	---------------------------------------------------------------------	-----------------------------------------------------------------	--------------------------------------------------------------	------------------------------------------------------------------------



# HERITAGE LUXE AZURE



**STOCKED ITEM: 48" x 111"**

**FINISH:** Glossy


**THICKNESS:** 6mm

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b>  <b>≥ 0.42</b>  ANSI 137.1	<b>WATER ABSORPTION</b>  <b>0.08%</b>  ISO 10545-3	<b>CHEMICAL RESISTANCE</b>  <b>ULA ULB</b>  ISO 10545-13	<b>FROST RESISTANCE</b>  <b>RESISTANT</b>  ISO 10545-12	<b>BREAKING STRENGTH</b>  <b>1350 N</b>  ISO 10545-4	<b>ABRASION RESISTANCE</b>  <b>CL. 4 - CL. 5</b>  ISO 10545-12
--------------------------------------------------------------------------------------------------	------------------------------------------------------------------------	--------------------------------------------------------------------	--------------------------------------------------------------------------	-------------------------------------------------------------------------	----------------------------------------------------------------------	--------------------------------------------------------------------------------



# PREXIOUS CHARMING AMBER

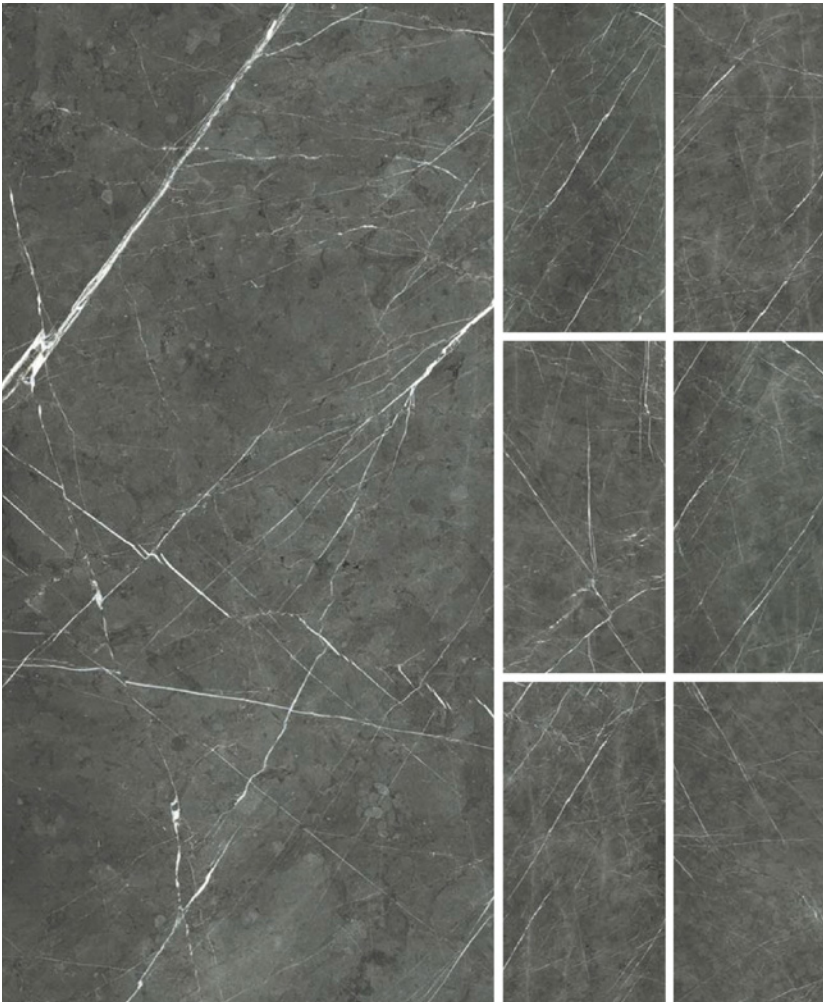

Coordinating 10mm  
**STOCKED ITEM: 12" x 24"**  
**FINISH: Glossy & Natural**  
**STOCKED ITEM: 1" x 6" Mosaic**  
**FINISH: Natural**

## SPECIAL ORDER ITEMS

63" x 126"  
 63" x 63"  
 47<sup>1</sup>/<sub>4</sub>" x 110<sup>1</sup>/<sub>4</sub>"  
 47<sup>1</sup>/<sub>4</sub>" x 94<sup>1</sup>/<sub>2</sub>"  
 47<sup>1</sup>/<sub>4</sub>" x 47<sup>1</sup>/<sub>4</sub>"  
 23<sup>5</sup>/<sub>8</sub>" x 47<sup>1</sup>/<sub>4</sub>"

Thickness 6mm  
**FINISH: GLOSSY/MATTE**

**STOCKED ITEM: 47<sup>1</sup>/<sub>4</sub>" x 110<sup>1</sup>/<sub>4</sub>"**

**FINISH: Glossy**

**THICKNESS: 6mm**

*ETA 10-15 weeks to confirm  
 at the time of the order.*

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET)                  MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER                  ABSORPTION</b> <b>&lt; 0.5%</b> ISO 10545-3	<b>CHEMICAL                  RESISTANCE</b> <b>GA-GLB-GLA</b> ISO 10545-13	<b>FROST                  RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING                  STRENGTH</b> <b>≥ 700 N</b> ISO 10545-4	<b>ABRASION                  RESISTANCE</b> <b>CL. 2</b> ISO 10545-7
--------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------	---------------------------------------------------------------------------------	--------------------------------------------------------------------------------------	----------------------------------------------------------------------------------	--------------------------------------------------------------------------------	--------------------------------------------------------------------------------



Le terre del Palmezzano  
DIE ARENA VON FERONA

FASTI  
CIVICO I FASTI  
CUZIO RUFO STORIA DI ALESSANDRO  
LE LIT DE  
L'ARCA FIORENTINA  
MONACHE DEL TIL

Scienza  
tecnologia  
della stampa  
**Grafica 2**  
RICCARDO TULLIO  
RICCARDO TULLIO

IL TEATRO LA FENICE  
Ludwig Windstoßer Thilo Koch  
*Brevi dispersa* BERLIN




# PREXIOUS THUNDER NIGHT

Coordinating 10mm

**STOCKED ITEM: 12" x 24"**  
**FINISH: Glossy & Natural**

**STOCKED ITEM: 1" x 6" Mosaic**  
**FINISH: Natural**

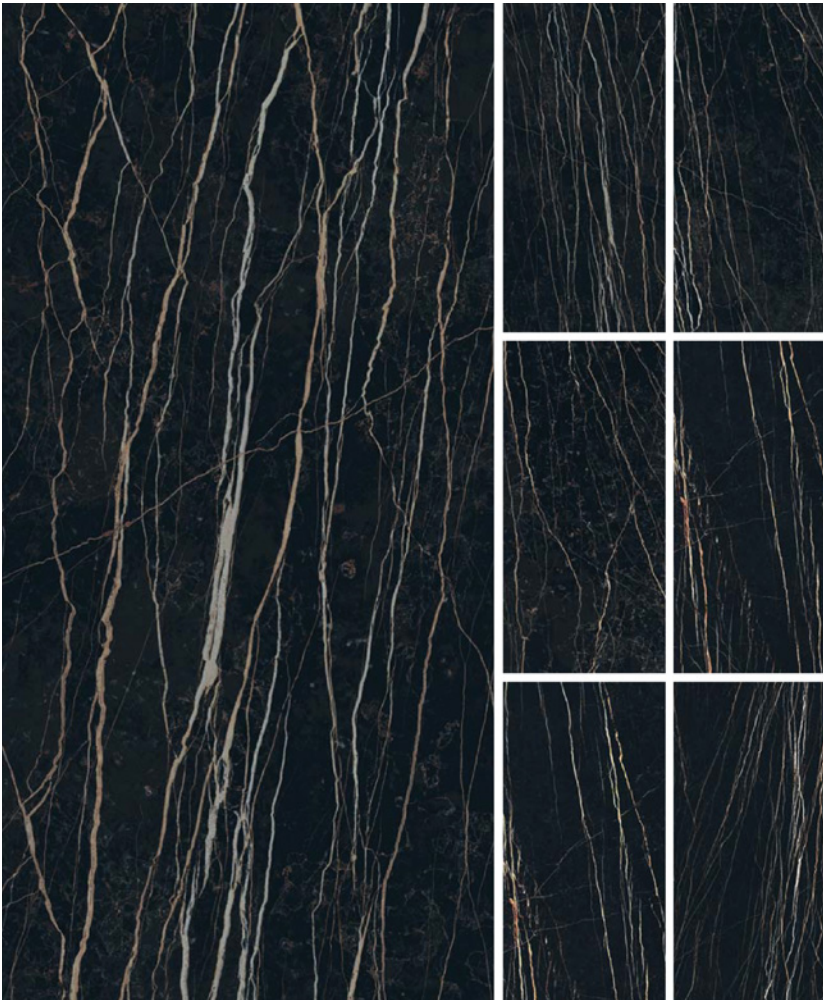

## SPECIAL ORDER ITEMS

63" x 126"  
63" x 63"  
47<sup>1</sup>/<sub>4</sub>" x 110<sup>1</sup>/<sub>4</sub>"  
47<sup>1</sup>/<sub>4</sub>" x 94<sup>1</sup>/<sub>2</sub>"  
47<sup>1</sup>/<sub>4</sub>" x 47<sup>1</sup>/<sub>4</sub>"  
23<sup>5</sup>/<sub>8</sub>" x 47<sup>1</sup>/<sub>4</sub>"

Thickness 6mm  
**FINISH: GLOSSY/MATTE**

**STOCKED ITEM: 47<sup>1</sup>/<sub>4</sub>" x 110<sup>1</sup>/<sub>4</sub>"**

**FINISH: Glossy**

**THICKNESS: 6mm**

*ETA 10-15 weeks to confirm  
at the time of the order.*


## TECHNICAL DATA

<p><b>V3</b></p> 	<p>D.C.O.F. (WET) MATTE</p> <p>≥ 0.42</p> <p>ANSI 137.1</p>	<p>WATER ABSORPTION</p> <p>&lt; 0.5%</p> <p>ISO 10545-3</p>	<p>CHEMICAL RESISTANCE</p> <p><b>GA-GLB-GLA</b></p> <p>ISO 10545-13</p>	<p>FROST RESISTANCE</p> <p><b>RESISTANT</b></p> <p>ISO 10545-12</p>	<p>BREAKING STRENGTH</p> <p>≥ 700 N</p> <p>ISO 10545-4</p>	<p>ABRASION RESISTANCE</p> <p><b>CL. 2</b></p> <p>ISO 10545-7</p>
------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------	-----------------------------------------------------------------	-----------------------------------------------------------------------------	-------------------------------------------------------------------------	----------------------------------------------------------------	-----------------------------------------------------------------------



# STONES 2.0

## SAHARA NOIR

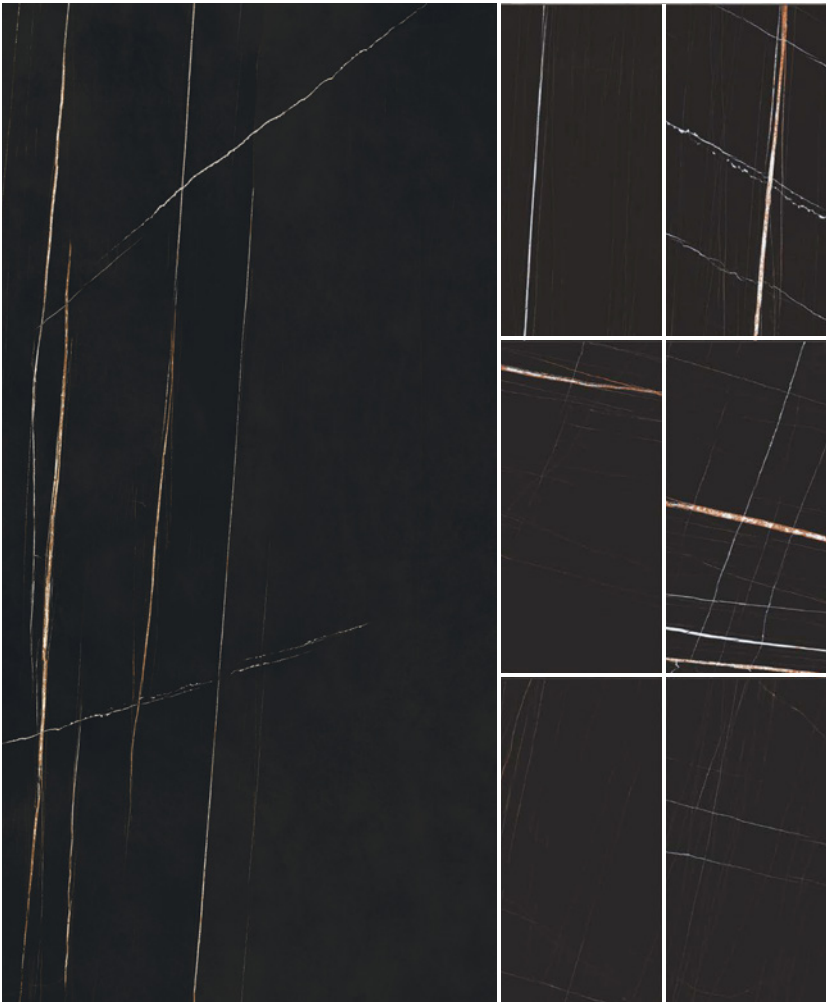

**STOCKED ITEM:** 47 1/4" x 94 1/4"

**FINISH:** Glossy

**THICKNESS:** 6mm

### SPECIAL ORDER ITEMS

48" x 95"

48" x 48"

32" x 32"

24" x 48"

Thickness 6mm  
**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

### TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>&lt; 0.5%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>ULB-ULA</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>1350 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>CL. 3 - CL. 4</b> ISO 10545-7
---------------	----------------------------------------------------------------	----------------------------------------------------------------	------------------------------------------------------------------	-----------------------------------------------------------------	--------------------------------------------------------------	-----------------------------------------------------------------------



# REVES DE REX BLEU

Coordinating 10mm

**STOCKED ITEM: 24" x 24"**  
**FINISH: Glossy & Matte**



**STOCKED ITEM: 47 1/4" x 110 1/4"**

**FINISH: Glossy**

**THICKNESS: 6mm**

## SPECIAL ORDER ITEMS

63" x 126"

48" x 111"

48" x 95"

48" x 48"

24" x 48"

Thickness 6mm  
**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>&lt; 0.5%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>GA - GLB</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>≥1300 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>CL. 4</b> ISO 10545-7
--------------------------------------------------------------------------------------------------	----------------------------------------------------------------	----------------------------------------------------------------	-------------------------------------------------------------------	-----------------------------------------------------------------	---------------------------------------------------------------	---------------------------------------------------------------



# REVES DE REX PERLE



Coordinating 10mm

**STOCKED ITEM: 24" x 24"**  
**FINISH: Glossy & Matte**

---

**STOCKED ITEM: 24" x 48"**  
**FINISH: Glossy**

**STOCKED ITEM: 63" x 126"**  
**FINISH: Glossy**  
**THICKNESS: 6mm**

**SPECIAL ORDER ITEMS**

- 63" x 126"
- 48" x 111"
- 48" x 95"
- 48" x 48"
- 24" x 48"

Thickness 6mm  
**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

**TECHNICAL DATA**

<p><b>V3</b></p>	<p>D.C.O.F. (WET) MATTE</p> <p><b>≥ 0.42</b></p> <p>ANSI 137.1</p>	<p>WATER ABSORPTION</p> <p><b>&lt; 0.5%</b></p> <p>ISO 10545-3</p>	<p>CHEMICAL RESISTANCE</p> <p><b>GA - GLB</b></p> <p>ISO 10545-13</p>	<p>FROST RESISTANCE</p> <p><b>RESISTANT</b></p> <p>ISO 10545-12</p>	<p>BREAKING STRENGTH</p> <p><b>≥1300 N</b></p> <p>ISO 10545-4</p>	<p>ABRASION RESISTANCE</p> <p><b>CL. 4</b></p> <p>ISO 10545-7</p>
------------------	------------------------------------------------------------------------	------------------------------------------------------------------------	---------------------------------------------------------------------------	-------------------------------------------------------------------------	-----------------------------------------------------------------------	-----------------------------------------------------------------------





# ORIGINES DE REX DOREE



Coordinating 10mm  
**STOCKED ITEM: 12" x 24"**  
**FINISH: Glossy & Matte**  
**STOCKED ITEM: 1 1/8" x 6" Mosaic**  
**FINISH: Matte**

## SPECIAL ORDER ITEMS

63" x 126"  
48" x 111"  
48" x 95"  
48" x 48"  
24" x 48"

Thickness 6mm  
**FINISH: GLOSSY/MATTE**

*ETA 10-15 weeks to confirm  
at the time of the order.*

**STOCKED ITEM: 47 1/4" x 110 1/4"**

**FINISH: Glossy**

**THICKNESS: 6mm**

## TECHNICAL DATA

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>&lt; 0.5%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>GLB</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>≥ 1300 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>CL. 4</b> ISO 10545-7
---------------	----------------------------------------------------------------	----------------------------------------------------------------	--------------------------------------------------------------	-----------------------------------------------------------------	----------------------------------------------------------------	---------------------------------------------------------------



# FLOWTECH

---



## **BURNISHED**

**STOCKED ITEM:** 47 1/4" x 94 1/2"

**FINISH:** Matte

**THICKNESS:** 6mm



## **AGED BRONZE**

**STOCKED ITEM:** 47 1/4" x 94 1/2"

**FINISH:** Matte

**THICKNESS:** 6mm



## **RUSSET**

**STOCKED ITEM:** 47 1/4" x 94 1/2"

**FINISH:** Matte

**THICKNESS:** 6mm

## TECHNICAL DATA

---

<b>V3</b> 	<b>D.C.O.F. (WET) MATTE</b> <b>≥ 0.42</b> ANSI 137.1	<b>WATER ABSORPTION</b> <b>&lt; 0.5%</b> ISO 10545-3	<b>CHEMICAL RESISTANCE</b> <b>UA-UHA-ULA</b> ISO 10545-13	<b>FROST RESISTANCE</b> <b>RESISTANT</b> ISO 10545-12	<b>BREAKING STRENGTH</b> <b>≥ 1300 N</b> ISO 10545-4	<b>ABRASION RESISTANCE</b> <b>&lt; 175 mm<sup>3</sup></b> ISO 10545-6
---------------	------------------------------------------------------------	------------------------------------------------------------	-----------------------------------------------------------------	-------------------------------------------------------------	------------------------------------------------------------	-----------------------------------------------------------------------------



# BERNINI CLASSICO

## AVAILABLE SIZES



**120" x 60"**

Polished & Honed Finish




**60" x 60"**

Polished & Honed Finish



**30" x 60"**

Polished & Honed Finish



**30" x 30"**

Polished & Honed Finish

## BOOK-MATCH



**A**

**B**

**\* STOCKED ITEM: 60" x 126"**

**FINISH: Polished**

*Bookmatch only available in 60" x 126" x 12mil*



## TECHNICAL DATA

*\*60" x 126" - Thickness 12mm  
All other sizes - Thickness 6mm*

**V1-V3**



D.C.O.F. (WET)  
HONED

≥ 0.42 - ≤ 0.60

BOT 3000

WATER  
ABSORPTION

< 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

BREAKING  
STRENGTH

≥ 200 LBS

ASTM C648

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243




# BERNINI ORO

## AVAILABLE SIZES



**120" x 60"**

Polished & Honed Finish

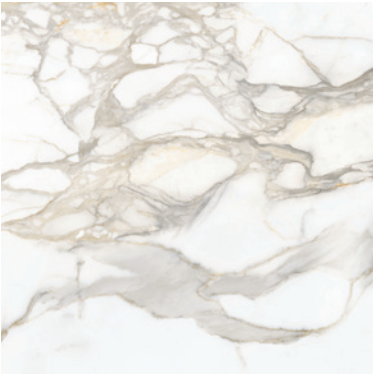

**60" x 60"**

Polished & Honed Finish



**30" x 60"**

Polished & Honed Finish



**30" x 30"**

Polished & Honed Finish

## BOOK-MATCH



**A**

**B**

**\* STOCKED ITEM: 60" x 126"**

**FINISH: Polished**

*Bookmatch only available in 60" x 126" x 12mil*



## TECHNICAL DATA

*\*60" x 126" - Thickness 12mm  
All other sizes - Thickness 6mm*

**V1-V3**



D.C.O.F. (WET)  
HONED

≥ 0.42 - ≤ 0.60

BOT 3000

WATER  
ABSORPTION

< 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

BREAKING  
STRENGTH

≥ 200 LBS

ASTM C648

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243





# CARRARA ZEBRINO

## AVAILABLE SIZES



**126" x 60" \***  
Polished Finish Only



**120" x 60"**  
Polished & Honed Finish

*126" x 60" - Thickness 12mm \**  
*All other sizes - Thickness 6mm*



**60" x 60"**  
Polished & Honed Finish



**30" x 60"**  
Polished & Honed Finish



**30" x 30"**  
Polished & Honed Finish



## TECHNICAL DATA

<b>V1-V3</b> 	<b>D.C.O.F. (WET) HONED</b> $\geq 0.42 - \leq 0.60$ BOT 3000	<b>WATER ABSORPTION</b> $< 0.1\%$ ASTM C373	<b>CHEMICAL RESISTANCE</b> <b>CLASS A</b> ASTM C650	<b>FROST RESISTANCE</b> <b>NO DAMAGE</b> ASTM C1026	<b>BREAKING STRENGTH</b> $\geq 200 \text{ LBS}$ ASTM C648	<b>ABRASION RESISTANCE</b> $\leq 175\text{mm}$ ASTM C1243
------------------	--------------------------------------------------------------------	---------------------------------------------------	-----------------------------------------------------------	-----------------------------------------------------------	-----------------------------------------------------------------	-----------------------------------------------------------------



# PLATINUM GREY

## AVAILABLE SIZES



**120" x 60"**

Polished & Honed Finish




**60" x 60"**

Polished & Honed Finish



**30" x 60"**

Polished & Honed Finish



**30" x 30"**

Polished & Honed Finish

## BOOK-MATCH



**A**

**B**

**\* STOCKED ITEM: 60" x 126"**

**FINISH: Polished**

*Bookmatch only available in 60" x 126" x 12mil*



## TECHNICAL DATA

*\*60" x 126" - Thickness 12mm  
All other sizes - Thickness 6mm*

**V1-V3**

D.C.O.F. (WET)  
HONED

≥ 0.42 - ≤ 0.60

BOT 3000

WATER  
ABSORPTION

< 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

BREAKING  
STRENGTH

≥ 200 LBS

ASTM C648

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243



# TAJ MAHAL

## AVAILABLE SIZES




**126" x 60" \***  
Polished Finish Only



**30" x 60"**  
Polished Finish Only



**120" x 60"**  
Polished Finish Only



**30" x 30"**  
Polished Finish Only



## TECHNICAL DATA

126" x 60" - Thickness 12mm \*  
All other sizes - Thickness 6mm



WATER  
ABSORPTION  
**< 0.1%**  
ASTM C373

CHEMICAL  
RESISTANCE  
**CLASS A**  
ASTM C650

FROST  
RESISTANCE  
**NO DAMAGE**  
ASTM C1026

BREAKING  
STRENGTH  
**≥ 200 LBS**  
ASTM C648

ABRASION  
RESISTANCE  
**≤ 175mm**  
ASTM C1243




# WHITE STATUARIO

## AVAILABLE SIZES



**120" x 60"**

Polished & Honed Finish

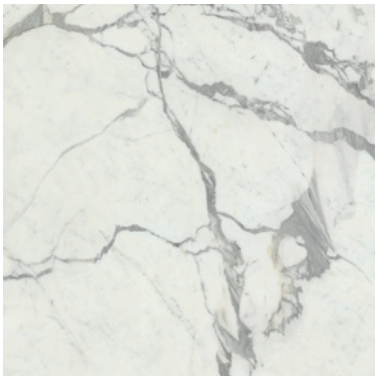


**60" x 60"**

Polished & Honed Finish



**30" x 60"**


Polished & Honed Finish



**30" x 30"**

Polished & Honed Finish

## BOOK-MATCH

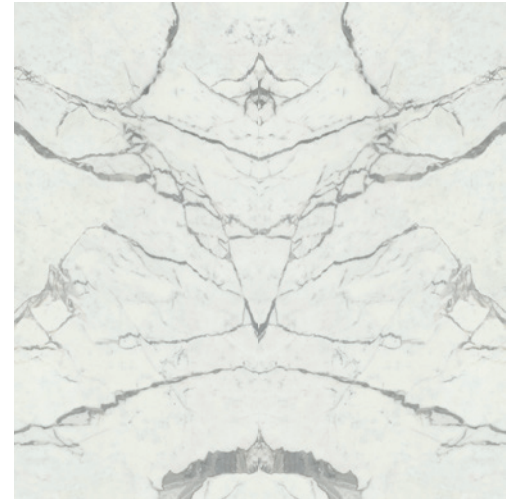

**A**

**B**

**\* STOCKED ITEM: 60" x 126"**

**FINISH: Polished**

*Bookmatch only available in 60" x 126" x 12mil*



## TECHNICAL DATA

*\*60" x 126" - Thickness 12mm  
All other sizes - Thickness 6mm*

**V1-V3**



D.C.O.F. (WET)  
HONED

≥ 0.42 - ≤ 0.60

BOT 3000

WATER  
ABSORPTION

< 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

BREAKING  
STRENGTH

≥ 200 LBS

ASTM C648

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243





# CALACATTA ORO

## AVAILABLE SIZES



**120" x 60"**

Polished & Honed Finish



**60" x 60"**

Polished & Honed Finish



**30" x 60"**

Polished & Honed Finish



## TECHNICAL DATA

All sizes - Thickness 6mm

**V1-V3**



D.C.O.F. (WET)  
HONED

≥ 0.42 - ≤ 0.60

BOT 3000

WATER  
ABSORPTION

≤ 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

STAIN  
RESISTANCE

**CLASS A**

ASTM C1378

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243



# STATUARIO VERO


## AVAILABLE SIZES



**120" x 60"**  
Polished & Honed Finish



**60" x 60"**  
Polished & Honed Finish

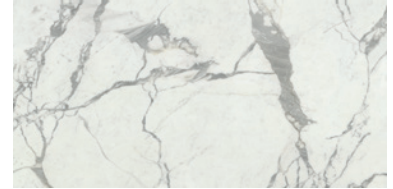

**30" x 60"**  
Polished & Honed Finish



## TECHNICAL DATA

All sizes - Thickness 6mm



D.C.O.F. (WET)  
HONED  
**≥ 0.42 - ≤ 0.60**  
BOT 3000

WATER  
ABSORPTION  
**≤ 0.1%**  
ASTM C373

CHEMICAL  
RESISTANCE  
**CLASS A**  
ASTM C650

FROST  
RESISTANCE  
**NO DAMAGE**  
ASTM C1026

STAIN  
RESISTANCE  
**CLASS A**  
ASTM C1378

ABRASION  
RESISTANCE  
**≤ 175mm**  
ASTM C1243



# BIANCO CARRARA

## AVAILABLE SIZES



**120" x 60"**

Polished & Honed Finish



**60" x 60"**

Polished & Honed Finish



**30" x 60"**

Polished & Honed Finish



## TECHNICAL DATA

All sizes - Thickness 6mm

**V1-V3**



D.C.O.F. (WET)  
HONED

≥ 0.42 - ≤ 0.60

BOT 3000

WATER  
ABSORPTION

≤ 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

STAIN  
RESISTANCE


**CLASS A**

ASTM C1378

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243



AFTER the END AUTHOR NAME  
An Architectural History Daniel M. Abramson  
THE BIG SLEEP RAYMOND CHANDLER

AFTER the END AUTHOR NAME  
An Architectural History Daniel M. Abramson

C. J. REDWINE



# SIERRA GREY

## AVAILABLE SIZES



**120" x 60"**  
Polished Finish



**60" x 60"**  
Polished Finish



## TECHNICAL DATA

All sizes - Thickness 6mm

**V1-V3**



WATER  
ABSORPTION

≤ 0.1%

ASTM C373

CHEMICAL  
RESISTANCE

**CLASS A**

ASTM C650

FROST  
RESISTANCE

**NO DAMAGE**

ASTM C1026

STAIN  
RESISTANCE

**CLASS A**

ASTM C1378

ABRASION  
RESISTANCE

≤ 175mm

ASTM C1243





# PEAK WHITE

## AVAILABLE SIZES



**120" x 60"**  
Polished Finish



**60" x 60"**  
Polished Finish



## TECHNICAL DATA

All sizes - Thickness 6mm



WATER  
ABSORPTION  
**≤ 0.1%**  
ASTM C373

CHEMICAL  
RESISTANCE  
**CLASS A**  
ASTM C650

FROST  
RESISTANCE  
**NO DAMAGE**  
ASTM C1026

STAIN  
RESISTANCE  
**CLASS A**  
ASTM C1378

ABRASION  
RESISTANCE  
**≤175mm**  
ASTM C1243

# INSTALLATION



## MULTIMAX LITE

The ultimate, lightweight one-step, polymer fortified, Large and Heavy Tile mortar for interior and exterior installation of ceramic tile, porcelain tile, glass tile, stone, quarry tile, pavers and brick. MULTIMAX LITE features maximum non-sag performance on walls and maximum buildup of up to 3/4" (19 mm) without shrinkage on floors.



## 257 TITANIUM

The ultimate, lightweight one-step, polymer fortified, thin-set mortar that is ideal for the installation of Gauged Porcelain Tile Panels/ Slabs (GPTP) as well as for interior and exterior installation of ceramic tile, porcelain tile, stone, quarry tile, pavers and brick.



## 254 PLATINUM

The ultimate one-step, polymer fortified, thin-set mortar for interior and exterior installation of ceramic tile, porcelain tile, Gauged Porcelain Tile Panels/Slabs (GTP), stone, quarry tile, pavers and brick.

# INSTALLATION



## ULTRABOND ECO GPT

Ultrabond ECO GPT is a single-component, non-sag, easy-to-trowel, hybrid polymer-based adhesive technology specially designed for the installation of gauged porcelain tile and gauged porcelain tile panels/slabs on interior vertical surfaces and countertops. Unique technology advancements are incorporated in the formulation of Ultrabond ECO GPT for delivering instant grab, while allowing for the needed adjustability of panels and large-format tile.



## MAPEI ULTRALITE S2

MAPEI Ultralite S2 is a premium-grade, lightweight, single-component thin-set mortar that is ideal for installation of gauged (formerly "thin") porcelain tile.

This high-performance, highly deformable, polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application. MAPEI Ultralite S2 features a long open time and superior transfer properties to enhance back-buttering, and can be used also for ceramic tile and stone. MAPEI Ultralite S2 's unique Ultralite Technology™ provides twice the coverage of a standard thin-set mortar per pound/kg and may contribute to LEED points with 20% recycled content.

The image features a complex, organic marbled pattern in shades of light grey, beige, and cream. The pattern consists of irregular, vein-like shapes and swirls that create a sense of depth and movement. In the center of the image, the text 'WWW.STPTILE.COM' is displayed in a bold, dark brown, sans-serif font. This text is framed by two thin, horizontal lines, one positioned above and one below the text itself.

**WWW.STPTILE.COM**