



multitudes

MULTI-LOOKS FOR MULTIFAMILY
V2 | 2023



Beautiful
SPACES
NEED GREAT
RESOURCES

Specialty Tile's array of products and services transform multi-family and hotel units into spaces people want to stay in. We offer a broad selection of porcelain, ceramic & glass options that work within even the smallest budgets to make the maximum impact for your design. Many series are made in the USA and domestically stocked series with efficient lead times.

Beautiful spaces need great resources.
We want to be yours.



PRICING REFLECTS QUANTITIES OVER 10,000 SQ FT

For additional images, product information, or to view the entire STP Tile collection, you can simply scan the QR Code or visit our website at **STPTILE.COM**

For samples, please email your sales rep or **Samples@specialtytile.com**

TABLE OF CONTENTS

CONCRETE LOOK

CONCRETE CHIC	5
MODERNISTA	6
STREETS	7
FRESCO	8

DECORATIVE LOOK

HIVE	9
PENNIES	10
SERENTINA	11

MARBLE LOOK

ERA	12
JOYAS	13
CRESTE	14
MARMOL	15
APOLLO	16
ADONIS	17

STONE LOOK

TERRACES	18
MAUNA LOA	19
AVENTO	20
AMITY	21
DELICATE	22
PEAK RIDGE	23
STREAMS	24
SANDSCAPE	25

TERRAZZO LOOK

PLATFORM	26
----------	----

VEIN CUT LOOK

DELTA	27
-------	----

WALL TILE

SOBU	28
DRIFT	29
SUSSEX	30
CRESCENT	31
SIMPLICITY	32

WOOD LOOK

RIVERWOOD	33
FIREWOOD	34
NATIVE	35
MODERN RIDGE	36

FABRIC LOOK

CAMBRIC	37
FRAY	38

MULTI LOOK

SYNDICATE	39
-----------	----

CONCRETE CHIC



Installation Images



Current Cream



Elegant Gray

Size: 12" x 24"

Finish: Matte Pressed

Thickness: 8 mm

Trim: 3" x 12" Bullnose
6" x 12" Cove Base
6" x 1" Cove Base Corner

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.25

TECHNICAL DATA



D.C.O.F.
(NATURAL)
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
< 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LBS.
ASTM C648

MOHS
HARDNESS
8
MOHS

ABRASION
RESISTANCE
3-4
ASTM C1027

MODERNISTA




Installation Images



Creme



Tan



Grey



Coffee



Black

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Rectified

Thickness: 8 mm


Trim: 3" x 12" Bullnose
6" x 12" Cove Base

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$2.50

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.55
BOT 3000

WATER
ABSORPTION
≤ 0.1%
ASTM C373

CHEMICAL
RESISTANCE
CLASS A
ASTM C650

FROST
RESISTANCE
NO DAMAGE
ASTM C1026

BREAKING
STRENGTH
> 400 LBF
ASTM C648


ABRASION
RESISTANCE
CLASS 4
ASTM C1027

CONCRETE LOOK

STREETS



Installation Images




White



Beige



Light Grey



Dark Grey

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Pressed

Thickness: 8 mm

Trim: 3" x 24" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.50

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
≤ 0.5%
ASTM C373

CHEMICAL
RESISTANCE
NOT AFFECTED
ASTM C650

FROST
RESISTANCE
NOT AFFECTED
ASTM C1026

BREAKING
STRENGTH
≥ 400
ASTM C648

ABRASION
RESISTANCE
IV
ASTM C1027

FRESCO



Installation Images



Titanium White



Storm Gray



Canvas White



Coventry Gray



Carbon Black



Canvas Moka



Taupe Gray



Cape Gray

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Rectified

Thickness: 10 mm


Trim: 3" x 24" Bullnose
6" x 12" Cove Base

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$3.25

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.66
ANSI A 137.1

WATER
ABSORPTION
≤ 0.5%
ASTM C373

CHEMICAL
RESISTANCE
CLASS A
ASTM C650

FROST
RESISTANCE
RESISTANT
ASTM C1026

BREAKING
STRENGTH
≥ 400 LBF
ASTM C648


ABRASION
RESISTANCE
4
ASTM C1027

DECORATIVE LOOK

HIVE



Installation Images

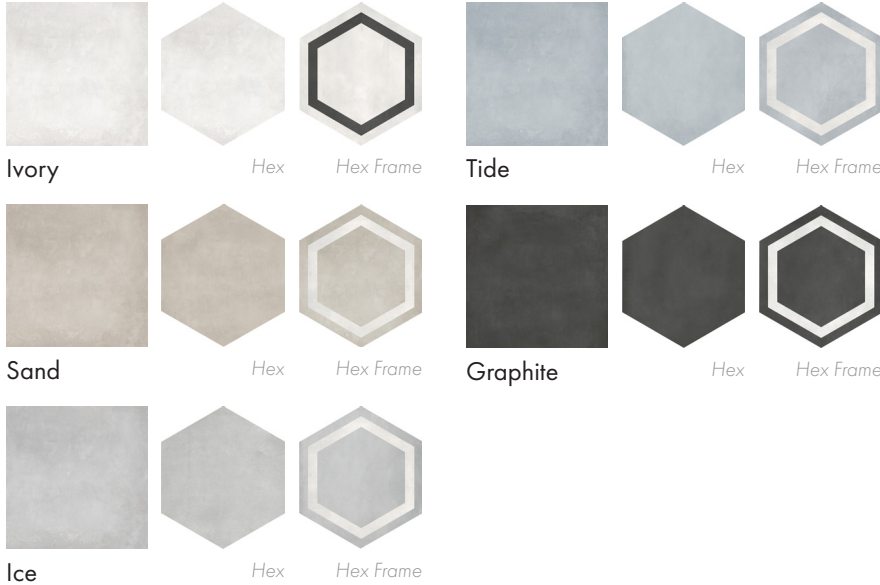

Size: 8" x 8" | 7" x 8" Hex

Finish: Matte Pressed

Thickness: 9 mm

Trim: 2" x 8" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT.

8" x 8"

7" x 8" Hexagon

\$3.00

\$4.00


TECHNICAL DATA

V2 	D.C.O.F. WET ≥ 0.55 ANSI B 101.3	WATER ABSORPTION ≤ 0.5% ISO 10545-3	CHEMICAL RESISTANCE RESISTANT ISO 10545-13	FROST RESISTANCE RESISTANT ISO 10545-12	BREAKING STRENGTH ≥ 310 N ISO 10545-4	ABRASION RESISTANCE 4 ISO 10545-7
---------------	---	--	---	--	--	--


PENNIES FROM HEAVEN




Installation Images




Black




Dark Grey




Taupe




White




Jade



Pale Blue



Smooth Grey



Moka

Size: 12" x 12" Sheet

Finish: Matte Pressed


Thickness: 5.5 mm

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$7.00

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
ANSI 137.1

FROST
RESISTANCE
RESISTANT
ISO 10545-12

CHEMICAL
RESISTANCE
GA GLA GHA
ISO 10545-13

STAIN
RESISTANCE
CLASS 5
ISO 10545-14

HARDNESS
MOHS
5
MOHS

SERENTINA



Installation Images



Bliss HB



Bliss Block



Bliss ITL



Tranquility HB



Tranquility B



Tranquility ITL



Zen HB



Zen Block



Zen ITL



Accord HB



Accord Block



Accord ITL



Solitude HB



Solitude Block



Solitude ITL



Composure HB



Composure B



Composure ITL

Size: Herringbone (HB) | Block (B) | Interlocking (ILT)

Finish: Glass & Stone Wall Mosaic

Thickness: 6.35 mm

PRICE PER SQ. FT

\$6.50

TECHNICAL DATA



WATER ABSORPTION
< 5%
ASTM C373

CHEMICAL RESISTANCE
RESISTANT
ASTM C650

BREAKING STRENGTH
> 100 LBS
ASTM C648


ABRASION RESISTANCE
4
ASTM C1027

MARBLE LOOK

ERA



Stone Gray-Ceramic Tile



Concrete Gray-Porcelain Tile



Timeless-Porcelain Tile



Calacatta-Porcelain Tile

Size: 12" x 24"

Finish: Matte Pressed

Thickness: 10 mm - Stone Gray
8 mm - Concrete Gray, Timeless & Calacatta

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$1.75

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
**< 7% - CERAMIC
< 5% - PORCELAIN**
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LBS
ASTM C1026

SCRATCH
HARDNESS
≥ 7
MOHS

MARBLE LOOK

JOYAS




Installation Images



Statuario Brina



Perla Grigia



Onyx Crystallo



Carrara Abisso

Size: 12" x 24" | 2" Hexagon Mosaic

Finish: Polished & Matte Rectified

Thickness: 8.5 mm

Trim: 3" x 12" Bullnose

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$2.75

TECHNICAL DATA



D.C.O.F.
WET (MATTE)
≥ 0.50
ANSI A 137.1

WATER
ABSORPTION
< 0.5%
ISO 10545-3

CHEMICAL
RESISTANCE
CLASS A
ISO 10545-13

FROST
RESISTANCE
PASS
ISO 10545-12

BREAKING
STRENGTH
> 1600 N
ISO 10545-4

ABRASION
RESISTANCE
CLASS 4
ISO 10545-6

CRESTE



Installation Images



Calacatta Dolce



Alto*



Curva*



Onyx Suave



Alto*



Curva*




Bianco Vita



Alto*



Curva*



Statuario Valore



Alto*



Curva*

Size: 12" x 36" & 3" x 12"

Finish: Matte Rectified (12" x 36") & Matte Pressed (3" x 12")

Thickness: 10 mm - (12" x 36") | 9 mm - (3" x 12")

Recommended Grout: 1/8" Rectified | 3/16" Pressed


* Alto & Curva **ONLY** available in 12" x 36"

PRICE PER SQ. FT

3" x 12" | 12" x 36"

\$3.50

TECHNICAL DATA



WATER
ABSORPTION
10% - 18%
ISO 10545-3

CHEMICAL
RESISTANCE
CLASS B
ISO 10545-13

BREAKING
STRENGTH
> 950 N
ISO 10545-12


ABRASION
RESISTANCE
CLASS 0
ISO 10545-4

MARBLE LOOK

MARMOL



Installation Images



Calacatta



Carrara



Statuary



Bardiglio



Cremino



Travertino Beige



Travertino Grey

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Pressed

Thickness: 8 mm


Trim: 3" x 12" Bullnose
6" x 12" Cove Base

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.50

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
BOT 3000

WATER
ABSORPTION
≤ 0.1%
ASTM C373

CHEMICAL
RESISTANCE
CLASS A
ASTM C650

FROST
RESISTANCE
RESISTANT
ASTM C1026

BREAKING
STRENGTH
≥ 400 LBF
ASTM C648

ABRASION
RESISTANCE
4
ASTM C1027


APOLLO



Installation Images



Calacatta Gold



Alaska Glacier



Renoir

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Pressed

Thickness: 8 mm

Trim: 3" x 24" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.50

TECHNICAL DATA



D.C.O.F. WET
≥ 0.42
ANSI A 137.1

WATER ABSORPTION
≤ 0.5%
ASTM C373

CHEMICAL RESISTANCE
NOT AFFECTED
ASTM C650

FROST RESISTANCE
NO DAMAGE
ASTM C1026

BREAKING STRENGTH
≥ 400
ASTM C648

ABRASION RESISTANCE
IV
ASTM C1027

ADONIS



Installation Images



Nero Venato



Arabescato



Calacatta Paonazzo




Statuarietto




Paradiso Argento



Carrara Gioia



Onyx Nuvolato



Statuario Nuovo



Travertino Instrata

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Polished & Matte Rectified

Thickness: 8 mm

Trim: 3" x 12" Bullnose

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$3.75

TECHNICAL DATA



D.C.O.F.
WET
Polished < 0.42
Honed ≥ 0.45
ANSI B 101.3

WATER
ABSORPTION
≤ 0.5%
ISO 10545-3

CHEMICAL
RESISTANCE
CL. A-RES
ISO 10545-13

FROST
RESISTANCE
RESISTANT
ISO 10545-12


BREAKING
STRENGTH
≥ 360 LBF
ISO 10545-4

ABRASION
RESISTANCE
4
ISO 10545-7


TERRACES



Installation Images



Venetian White



Torino Grey



Roman Beige



Tuscan Charcoal

Size: 12" x 24"

Finish: Matte Rectified

Thickness: 8 mm

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$2.00

TECHNICAL DATA



D.C.O.F. WET
≥ 0.42
 ANSI A 137.1

WATER ABSORPTION
< 0.5%
 ASTM C373

CHEMICAL RESISTANCE
RESISTANT
 ASTM C650

BREAKING STRENGTH
> 275 LBS
 ASTM C1026

SCRATCH HARDNESS
8
 MOHS

MAUNA LOA



Light



Dark

Size: 12" x 24"

Finish: Matte Pressed

Thickness: 10 mm

Trim: 3" x 12" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$1.75

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
< 7.0%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 250 LBS
ASTM C648

SCRATCH
HARDNESS
7
MOHS

AVENTO



Installation Images



Ivory



Beige



Gray

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Rectified

Thickness: 9.5 mm


Trim: 3" x 24" Bullnose

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$2.00

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
≤ 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LBS
ASTM C1026

ABRASION
RESISTANCE
4
ASTM C1027

AMITY




Installation Images



White



Beige



Gray

Size: 12" x 24"

Finish: Matte Pressed

Thickness: 8 mm

Trim: 3" x 12" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.25

TECHNICAL DATA



D.C.O.F.
WET
> 0.42
ANSI A 137.1

WATER
ABSORPTION
≤ 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

FROST
RESISTANCE
RESISTANT
ASTM C1026

BREAKING
STRENGTH
> 275 lbf
ASTM C648

ABRASION
RESISTANCE
PEI IV
ASTM C1027


DELICATE




Installation Images




Avorio



Grigio



Vanizio



Argento

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Pressed

Thickness: 8.5 mm

Trim: 3" x 12" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.50

TECHNICAL DATA



D.C.O.F. WET
≥ 0.65
 ANSI A 137.1

WATER ABSORPTION
< 0.5%
 ASTM C373

CHEMICAL RESISTANCE
CLASS A
 ASTM C650

FROST RESISTANCE
PASS
 ASTM C1026


BREAKING STRENGTH
≥ 300 LBF
 ASTM C648

ABRASION RESISTANCE
CLASS 4
 ASTM C1027

PEAK RIDGE



Installation Images



Buff



Ash

Size: 12" x 24" | 1-1/2" Hex Mosaic

Finish: Matte Pressed

Thickness: 8 mm


Trim: 3" x 12" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.00

TECHNICAL DATA



D.C.O.F.
WET
0.42
ANSI A 137.1

WATER
ABSORPTION
< 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LBS
ASTM C648

SCRATCH
HARDNESS
8.0
MOHS

STREAMS



Installation Images




White




Beige



Light Gray



Dark Gray



Black

Size: 12" x 24" | 1.5" Hexagon Mosaic

Finish: Matte Pressed

Thickness: 8 mm

Trim: 3" x 24" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.00

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.42
BOT 3000

WATER
ABSORPTION
< 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LBS
ASTM C648

ABRASION
RESISTANCE
CLASS 4
ASTM C1027

SANDSCAPE




Installation Images




White Sand



Sandbar



Sandstream



Black Sand

Size: 12" x 24" | 2" x 2" Basketweave
Finish: Matte Pressed & Matte Rectified
Thickness: 11 mm
Trim: 3" x 12" Bullnose
Recommended Grout: 1/8" or 3/16"

PRICE PER SQ. FT

\$3.00

TECHNICAL DATA



D.C.O.F.
WET (MATTE)
≥ 0.42
ANSI B 101.3

WATER
ABSORPTION
≤ 0.5%
ISO 10545-3

CHEMICAL
RESISTANCE
CLASS A-B
ISO 10545-13

FROST
RESISTANCE
RESISTANT
ISO 10545-12

BREAKING
STRENGTH
≥ 292 LBF
ISO 10545-4

ABRASION
RESISTANCE
4
ISO 10545-7


PLATFORM



Installation Images




Ivory



Ash



Pearl



Shadow

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Rectified

Thickness: 8.4 mm

Trim: 3" x 24" Bullnose

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$3.00

TECHNICAL DATA



D.C.O.F.
WET
≥ 0.45
ANSI B 101.3

WATER
ABSORPTION
≤ 0.5%
ISO 10545-3

CHEMICAL
RESISTANCE
CLASS A
ISO 10545-13

FROST
RESISTANCE
RESISTANT
ISO 10545-12

BREAKING
STRENGTH
≥ 360
ISO 10545-4

ABRASION
RESISTANCE
PEI 4
ISO 10545-7

DELTA



Installation Images



White




Beige



Cocoa



Greige



Dark Greige



Black

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Pressed

Thickness: 8 mm

Trim: 4" x 36" Bullnose

4" x 24" Bullnose

6" x 12" Cove Base

Recommended Grout: 1/8" or 3/16"

PRICE PER SQ. FT

\$3.00

TECHNICAL DATA



DCOF
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
≤ 0.1%
ASTM C373

CHEMICAL
RESISTANCE
CLASS A
ASTM C650

FROST
RESISTANCE
NO DAMAGE
ASTM C1026

BREAKING
STRENGTH
≥ 400 LBF
ASTM C648

ABRASION
RESISTANCE
CLASS 4
ASTM C1027

SOBU



Installation Images



Retro Black



Cement Chic



Cloud Blue




Soft Sage




Loft Grey



Halo Grey



Gallery Grey



Vintage Grey



Canvas White

Size: 4" x 16" | 2" Hexagon Mosaic | 3/4" Penny Round

Finish: Polished & Matte Rectified

Thickness: 7 mm - 8 mm

Trim: 2" x 8" Bullnose

Recommended Grout: 1/6"

PRICE PER SQ. FT

\$3.00

TECHNICAL DATA



WATER
ABSORPTION
18-P4
ANSI/ISO-(%)

CHEMICAL
RESISTANCE
CLASS B
ISO 10545-13

FROST
RESISTANCE
PASS
ISO 10545-12

BREAKING
STRENGTH
> 240 LBF
ISO 10545-4



SCRATCH
RESISTANCE
2
MOHS

WALL TILE

DRIFT



Installation Images

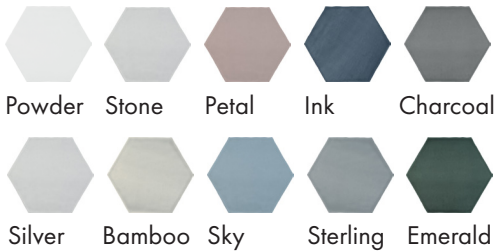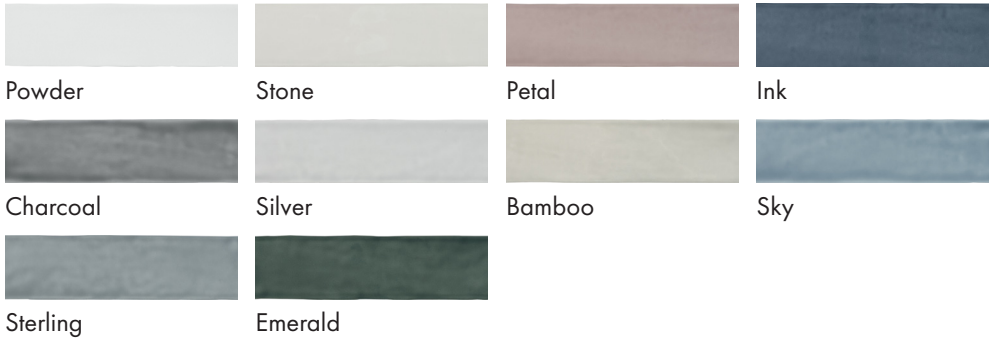

Size: 3" x 12" | 6" Hexagon

Finish: Glossy Rectified

Thickness: 9 mm

Trim: 12" Quarter Round

Recommended Grout: 3/16"

PRICE PER SQ. FT

3" x 12"

6" Hexagon

\$3.50

\$4.00


TECHNICAL DATA

V2 	WATER ABSORPTION 10% - 18% <small>ISO 10545-3</small>	CHEMICAL RESISTANCE CLASS B <small>ISO 10545-13</small>	FROST RESISTANCE NOT RESISTANT <small>ISO 10545-12</small>	BREAKING STRENGTH > 1000 N <small>ISO 10545-4</small>	SCRATCH RESISTANCE 2 <small>MOHS</small>
---------------	---	---	--	--	--

SUSSEX



Installation Images




Jet Black




Symphony Blue




Wisdom Grey




Essential Grey




Dew




Studio Beige




Pure




Cashmere




Ambition



Balance



Aqua



Nimbus

Size: 6" x 24" | 3" x 12" | 2" x 2" Mosaic

Finish: Glossy Wall Tile

Thickness: 8 mm

Trim: 6" x 24" Wall Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

6" x 24"

3" x 12"

\$3.00

\$4.75

TECHNICAL DATA



WATER ABSORPTION
≤ 0.4%
ASTM C373

CHEMICAL RESISTANCE
NOT AFFECTED
ASTM C650

FROST RESISTANCE
RESISTANT
ASTM C1026

BREAKING STRENGTH
≥ 400 LB
ASTM C648

STAIN RESISTANCE
NOT AFFECTED
ASTM C1378

CRESCENT



Installation Images



Plane




Modulation



Oblique



Prismatic



Amplitude

Size: 12" x 24"

Finish: Glossy & Matte Rectified

Thickness: 10 mm


Trim: 12" Quarter Round

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$2.75

TECHNICAL DATA



WATER
ABSORPTION
10% - 16%
ASTM C373

CHEMICAL
RESISTANCE
CLASS B
ASTM C650


BREAKING
STRENGTH
> 230 LBF
ASTM C648

ABRASION
RESISTANCE
CLASS O
ASTM C1027


SIMPLICITY




Installation Images



Ice



Ivory



Breeze

Size: 4" x 16" | 3" x 12" | 3" x 6"

Finish: Glossy & Matte Pressed

Thickness: 7.8mm (4" x 16" & 3" x 12") | 7mm (3" x 12")


Trim: 2" x 8" Bullnose | 2" x 6" Bullnose

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.00

TECHNICAL DATA



WATER
ABSORPTION
10%
ISO 10545-3

CHEMICAL
RESISTANCE
CLASS A
ISO 10545-13

BREAKING
STRENGTH
> 570
ISO 10545-4

ABRASION
RESISTANCE
CLASS 0
ISO 10545-6

RIVERWOOD



Installation Images



Cottage



Grey



Cedar



Driftwood



Brown

Size: 6" x 36"

Finish: Matte Pressed

Thickness: 8 mm

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.00

TECHNICAL DATA



DCOF
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
< 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LB
ASTM C648

MOHS
HARDNESS
8.0
MOHS

FIREWOOD



Installation Images



White



Spice



Natural



Charcoal

Size: 6" x 24"

Finish: Matte Pressed

Thickness: 8 mm

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$1.75

TECHNICAL DATA



DCOF
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
< 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LB
ASTM C648

MOHS
HARDNESS
8.0
MOHS

NATIVE



Installation Images



Pine



Birch



Teak



White Oak



Chestnut



Poplar

Size: 8" x 48"

Finish: Matte Pressed

Thickness: 10 mm

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$3.00

TECHNICAL DATA



DCOF
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
≤ 0.4%
ASTM C373

CHEMICAL
RESISTANCE
UNAFFECTED
ASTM C650

FROST
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
≥ 400 LBF
ASTM C648



MODERN RIDGE



Installation Images



Walnut



Pecan



Gunstock



Natural



Grey

Size: 6" x 36"

Finish: Matte Pressed

Thickness: 8 mm

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.25

TECHNICAL DATA



DCOF
WET
≥ 0.42
ANSI A 137.1

WATER
ABSORPTION
< 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

BREAKING
STRENGTH
> 275 LB
ASTM C648

SCRATCH
HARDNESS
8.0
ASTM-MOHS

ABRASION
RESISTANCE
PEI III
ASTM C1027


CAMBRIC



Installation Images




White




Silver



Putty



Warm Gray



Cool Gray

Size: 12" x 24" | 2" x 2" Basketweave Mosaic

Finish: Matte Rectified

Thickness: 10 mm

Trim: 3" x 12" Bullnose

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$3.25

TECHNICAL DATA



DCOF
WET
≥ 0.50
ANSI B 101.3

WATER
ABSORPTION
≤ 0.5%
ISO 10545-3

CHEMICAL
RESISTANCE
CLASS A
ISO 10545-13

FROST
RESISTANCE
RESISTANT
ISO 10545-12

BREAKING
STRENGTH
≥ 450 LBF
ISO 10545-4

DEEP
ABRASION
145 mm³
ISO 10545-7


FRAY




Installation Images




White



Ivory



Sand




Pearl




Taupe




Gray



Smoke



Tobacco



Black



Metal White



Metal Gray



Metal Black

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Pressed

Thickness: 9 mm


Trim: 3" x 24" Bullnose
6" x 12" Cove Base

Recommended Grout: 3/16"

PRICE PER SQ. FT

\$2.75

TECHNICAL DATA



DCOF
WET
> 0.42
ANSI A 137.1

WATER
ABSORPTION
≤ 0.5%
ASTM C373

CHEMICAL
RESISTANCE
RESISTANT
ASTM C650

FROST
RESISTANCE
RESISTANT
ASTM C1026

BREAKING
STRENGTH
≥ 350 LBF
ASTM C648

SYNDICATE



Installation Images



Light



Gray



Odyssey



White



Taupe



Road White



Road Ivory



Road Gray



Road Black

Size: 12" x 24" | 2" x 2" Mosaic

Finish: Matte Rectified

Thickness: 8 mm

Trim: 3" x 24" Bullnose

Recommended Grout: 1/8"

PRICE PER SQ. FT

\$2.50

TECHNICAL DATA

V2-V3 	DCOF WET ≥ 0.42 ANSI B 101.3	WATER ABSORPTION ≤ 0.5% ASTM C373	CHEMICAL RESISTANCE UNAFFECTED ASTM C650	FROST RESISTANCE RESISTANT ASTM C1026	BREAKING STRENGTH ≥ 250 LBF ASTM C648	ABRASION RESISTANCE IV ASTM C1027
------------------	---	--	---	--	--	--

WWW.STPTILE.COM

