


## GLAZED CERAMIC WALL TILE

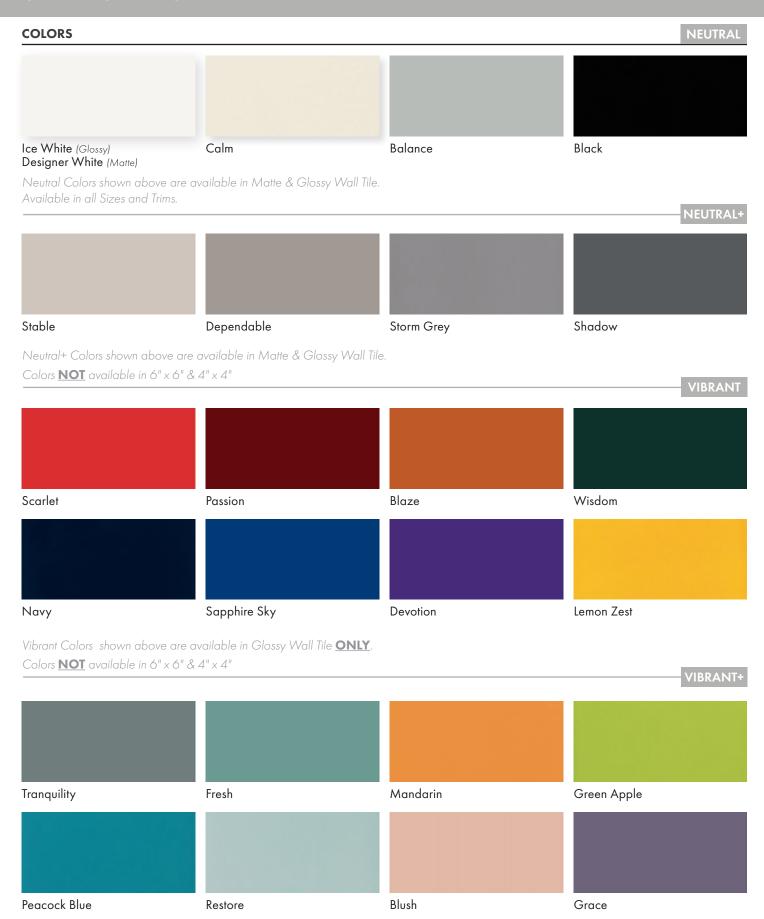

Vibrant+ Colors shown above are available in Glossy Wall Tile  $\underline{\textbf{ONLY}}$ . Colors  $\underline{\textbf{NOT}}$  available in  $8" \times 24"$ ,  $6" \times 6" \times 4" \times 4"$ 

## **COLOR STORY**


AVAILABLE SIZES	FINISH
8" x 24" 4" x 16" 4" x 12"	GLOSSY WALL TILE MATTE WALL TILE
2" x 8" 3" x 6" 6" x 6" 4" x 4"	<b>THICKNESS</b> 7.9 mm - 9.3 mm
TRIM  1/2" x 12" Jolly*  1" x 6" Quater Round ^  1" x 6" Quater Round Corner ^  SURFACE BULLNOSE ^  4" x 16" Bullnose	FLAT TOP COVE BASE $\wedge$ $4^{1/4"} \times 12^{7/8"} \text{ Cove Base}$ $3" \times 6" \text{ Cove Base}$ $3" \times 6" \text{ Cove Base Corner Right}$ $3" \times 6" \text{ Cove Base Corner Left}$ $4^{1/4"} \times 4^{1/4"} \text{ Cove Base}$ $4^{1/4"} \times 4^{1/4"} \text{ Cove Base Corner Left}$
41/4" x 12 <sup>7/8</sup> " Bullnose	SANITARY COVE BASE ^  6" x 6" Cove Base  6" x 6" Cove Base Corner Right  4"/4" x 6" Cove Base Corner Right  6" x 6" Cove Base Corner Left  4"/4" x 6" Cove Base Corner Left
RADIUS BULLNOSE ^  2" x 6" Bullnose  2" x 2" Bullnose Corner	SANITARY COVE BASE SLIM FOOT DESIGN ^  6" x 6" Cove Base

## **INSTALLATION & MAINTENANCE**

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

## **TECHNICAL DATA**



WATER
ABSORPTION
< 20.0%
ASTM C373

BREAKING STRENGTH 120-230 LBS ASTM C648 CHEMICAL RESISTANCE RESISTANT ASTM C650

<sup>\*</sup>Jolly is available in all colors (Neutral, Neutral+, Vibrant & Vibrant+)

<sup>^</sup>Surface Bullnose, Radius Bullnose, Flat Top Cove Base, Sanitary Cove Base & Base & Sanitary Cove Base Slim Foot Design **ONLY** available in Neutral & Neutral + Colors.

