



SHADEBOX



PORCELAIN TILE

SHADELINES COLORS



Light



Sand



Taupe



Grey




Dark


SHADEWOOD COLORS



Light



Grey



Sand



Dark



Taupe



Mix

SHADEBRICK COLORS



Light



Taupe




Grey



Dark

TECHNICAL DATA - SHADEBRICK (WALL TILE)



WATER
ABSORPTION

14-16%

ISO 10545-3

CHEMICAL
RESISTANCE

GB

ISO 10545-13

BREAKING
STRENGTH

> 1200 N

ISO 10545-4







ABRASION
RESISTANCE

3

ISO 10545-7

SHADEBOX

AVAILABLE SIZES

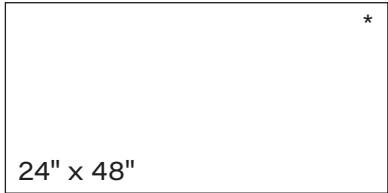

* Sizes available as Shadlines Only
 • Sizes available as Shadewood Only
 ◦ Sizes available as Shadebricks Only

FINISH

MATTE RECTIFIED

THICKNESS

10 mm

TRIM

- 4" x 24" Bullnose *Only available in Shadewood*
- 3/4" x 12" Quarter Round *Only available in Shadewood*
- 3" x 12" Bullnose *Only available in Shadebrick*
- 3/4" x 12" Quarter Round *Only available in Shadebrick*
- 1 1/4" x 12" Quarter Round *Only available in Shadelines*

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.



TECHNICAL DATA - SHADELINES & SHADEWOOD



D.C.O.F. WET
≥ 0.42
 ANSI A 137.1

WATER ABSORPTION
< 0.1%
 ISO 10545-3

CHEMICAL RESISTANCE
GB
 ISO 10545-13

FROST RESISTANCE
RESISTANT
 ISO 10545-12

BREAKING STRENGTH
≥ 1300 N
 ISO 10545-4

ABRASION RESISTANCE
5
 ISO 10545-7

