



B&W




COLORS



White







Breach

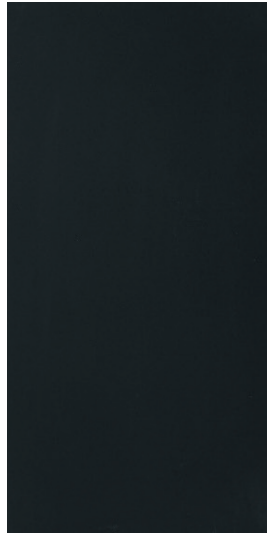


Black

AVAILABLE SIZES

THICKNESS: 9MM








1" x 1"
Mosaic




8" x 16"
Listello Mosaic

AVAILABLE SIZES


THICKNESS: 6MM

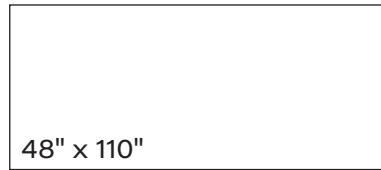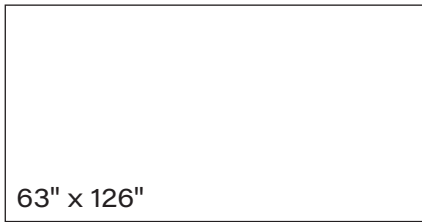

3" x 3"
Mosaic



3" x 6"
Brick Mosaic



1.5" x 3"
Brick Mosaic

FINISH

MATTE RECTIFIED
POLISHED RECTIFIED

THICKNESS

10mm | 6mm

TRIM


1⁴/₅" x 24" Bullnose Thickness 9mm (Polished)
1³/₄" x 24" Bullnose Thickness 9mm | 6mm
13" x 48" Stair Tread Thickness 9mm

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

TECHNICAL DATA



D.C.O.F.
WET (MATTE)

> 0.42

ANSI 137.1

WATER
ABSORPTION

< 0.5%

ISO 10545-3

CHEMICAL
RESISTANCE

UA-ULA-ULB

ISO 10545-13

FROST
RESISTANCE

RESISTANT

ISO 10545-12

BREAKING
STRENGTH

3200 N

ISO 10545-4

STAINING
RESISTANCE

CL. 4 - CL. 5

ISO 10545-7

