


**COLORS**



White Gold



Celtic Grey

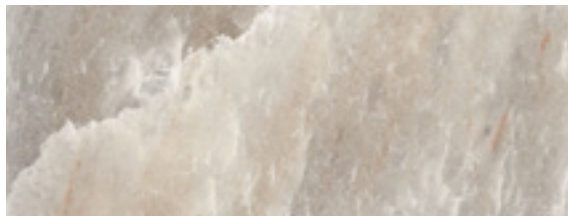

Danish Smoke




Maui Green ●



Hawaiian Red ● | Only available in 10mm Thickness

**AVAILABLE SIZES**

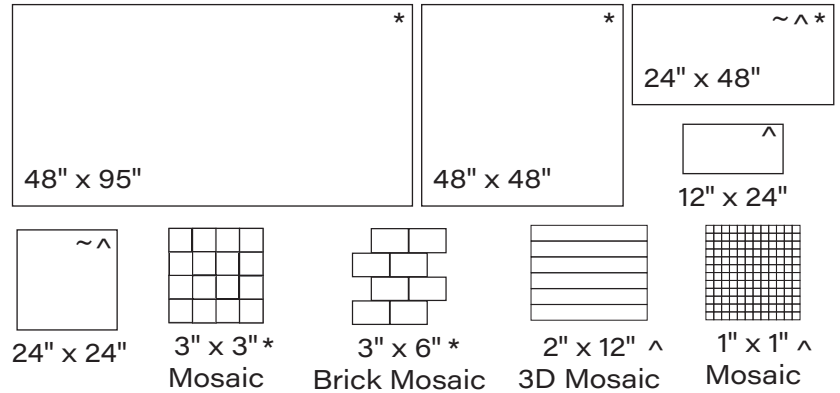

● Colors NOT available in 20mm Thickness

\* Sizes available in 6mm Thickness

^ Sizes available in 10mm Thickness

~ Sizes available in 20mm Thickness

12" x 24" Available in all finishes - 10mm Thickness

**FINISH**

MATTE RECTIFIED  
POLISHED RECTIFIED  
TEXTURED RECTIFIED

**THICKNESS**

6 mm | 10 mm | 20 mm (Outdoor Pavers)

**TRIM**


3" x 24" Bullnose

**INSTALLATION & MAINTENANCE**

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

**TECHNICAL DATA**



D.C.O.F WET
<b>&gt; 0.42</b>
TEXTURED   0.60
ANSI 137.1

WATER ABSORPTION
<b>0.08%</b>
ISO 10545-3

CHEMICAL RESISTANCE
<b>GA GLB GLA</b>
ISO 10545-13

FROST RESISTANCE
<b>RESISTANT</b>
ISO 10545-12

BREAKING STRENGTH
6 mm 1350 N
10 mm 3200N
20 mm 14000N
ISO 10545-4

ABRASION RESISTANCE
<b>CL.3 - CL.5</b>
ISO 10545-12

