


COLORS



Onyx Crema

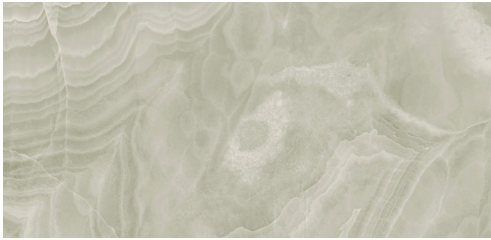

Onyx Sage



Onyx Feather




Onyx Hazel


AVAILABLE SIZES



48" x 110"



48" x 48"



36" x 36"






24" x 48"



24" x 24"



12" x 24"

Onyx Crema
2" Hexagon
MosaicOnyx Sage
2" Hexagon
MosaicOnyx Feather
2" Hexagon
MosaicOnyx Hazel
2" Hexagon
Mosaic

FINISH

HONED RECTIFIED
POLISHED RECTIFIED

THICKNESS

6 mm - 48" x 110"


9 mm - 48" x 48", 36" x 36",
24" x 48", 24" x 24", 12" x 24"

INSTALLATION & MAINTENANCE

Recommended Grout Size - 1/8"

For regular cleaning, use a neutral liquid detergent with a soft sponge or microfiber cloth. Persistent stains can be removed with a slightly abrasive sponge; if necessary, use a specially formulated stain remover.

TECHNICAL DATA



D.C.O.F.
WET
HONED - > 0.45
POLISHED - > 0.50
ANSI A 326.3

WATER
ABSORPTION
< 0.1%
ASTM C373

CHEMICAL
RESISTANCE
CLASS A
MIN. CLASS B
ASTM C650

FROST
RESISTANCE
PASS
ASTM C1026

BREAKING
STRENGTH
6mm - ≥ 310 lbf
9mm - ≥ 570 lbf
ASTM C648

ABRASION
RESISTANCE
< 140mm³
ASTM C1027



LUSTRA

