



AMERICAN OLEAN®  
FREEDOM OF EXPRESSION™

# unglazed mosaics

COLORBODY™ PORCELAIN TILE



PRE-CONSUMER  
RECYCLED MATERIALS



MADE IN  
THE U.S.A.



EXTERIOR  
PRODUCT

# unglazed mosaics


Always a classic, American Olean's Unglazed ColorBody Porcelain Mosaics provide unlimited options for virtually any space. From sophisticated neutrals to saturated deep tones to crisp, contemporary brights, the palette delivers on today's color trends. The size and shape options complete the design story, while standard and custom pattern options offer true freedom of expression.



Photo features Leopard Blend 1 x 1 mosaics on the wall.



## FIELD TILE

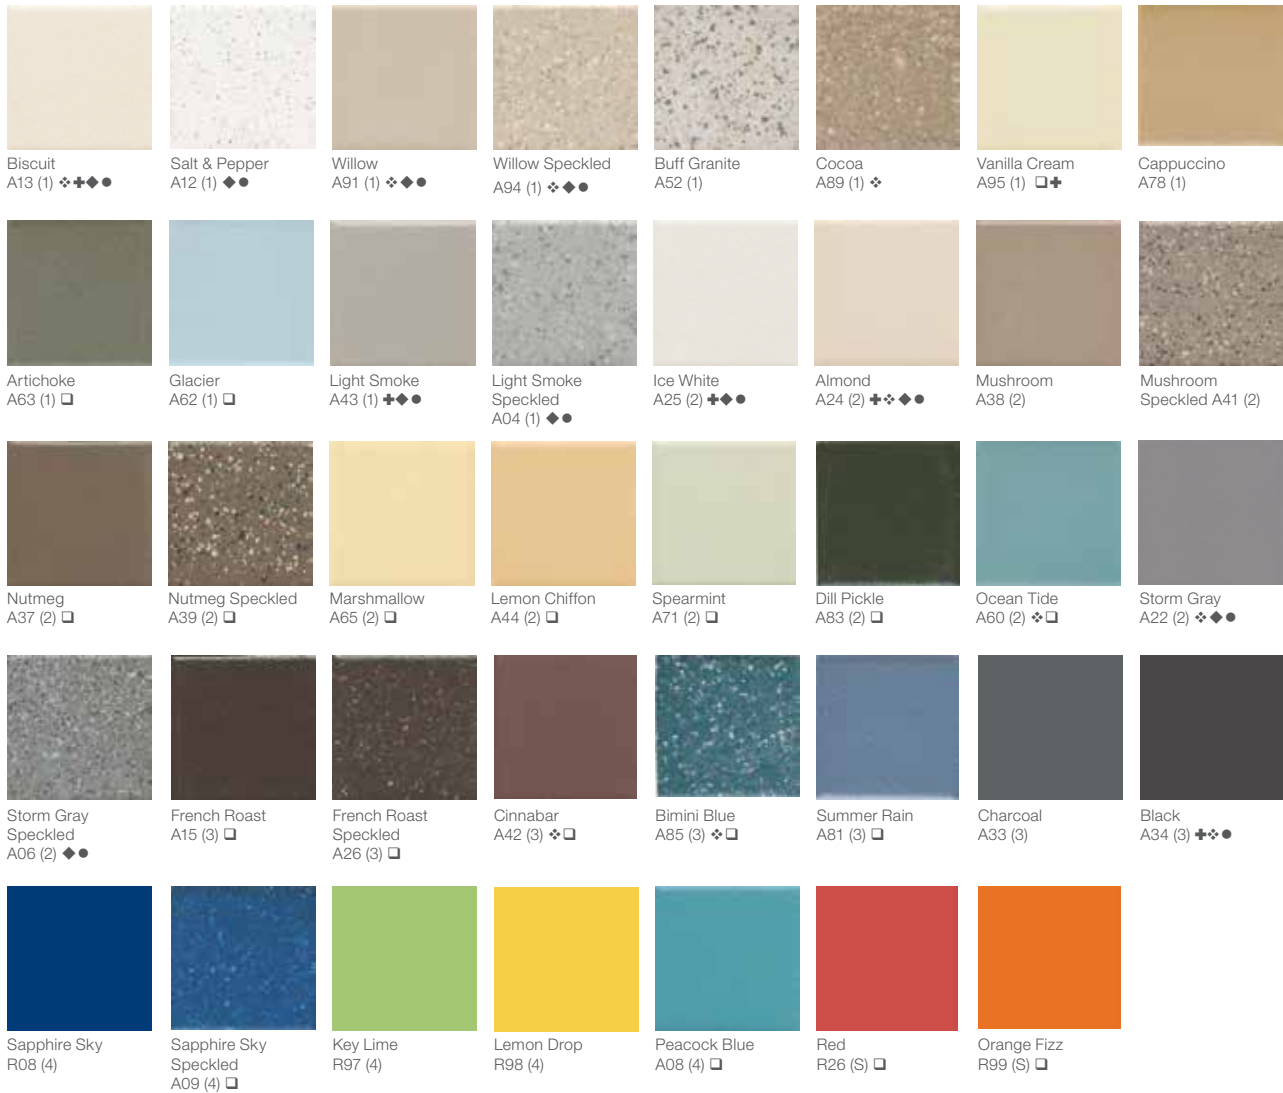

- ◆ Available in 1 x 1 hexagon
- ❖ Available with abrasive content made to order
- ◆ Available in 2 x 1 and 2 x 4 stocked
- Available in 2" hexagon made to order
- Made-to-order

(1) (2) (3) (4) (S) indicate price group, (1) being the least expensive.  
 1" Hexagon is stocked in Biscuit A13 and all other made-to-order.  
 All colors are available in 1 x 1 and 2 x 2 mosaics.

## MOSAIC BLENDS



Shimmering Sand A66 1 x 1 Mosaic Blend  
 (33% Almond A24, 33% Biscuit A13, 34% Willow A91)



Totally Neutral A67 1 x 1 Mosaic Blend  
 (40% Biscuit A13, 30% Willow A91, 30% Plaza Taupe\*)



Snow Leopard A68 1 x 1 Mosaic Blend  
 (30% Ice White A25, 15% Charcoal A33, 25% Storm Gray A22, 30% Light Smoke A43)



Mocha Cream A69 1 x 1 Mosaic Blend  
 (30% Almond A24, 25% Nutmeg A37, 30% Willow A91, 15% French Roast A15)

\*Plaza Taupe is a blend component only.



Photo features Salt & Pepper 2 x 1 mosaics.

## SIZES, SHADE VARIATION & PRICING

<b>2 x 2 Mosaic Tile (Dot-mounted)</b> (1-15/16" x 1-15/16") (1-15/16 cm x 1-15/16cm)	<b>1 x 1 Mosaic Tile (Dot-mounted)</b> (15/16" x 15/16") (2.4 cm x 2.4 cm)	<b>2 x 1 Mosaic (Dot-mounted)</b> (1-15/16" x 15/16") (5.1 cm x 2.5 cm)	<b>2 x 1 Brickwork Mosaic (Dot-mounted)</b> (1-15/16" x 15/16") (5.1 cm x 2.5 cm)	<b>2" Hexagon Mosaic (Dot-mounted)</b> (1-15/16" x 1-15/16") (5.1 cm x 5.1 cm)	<b>2 x 4 Mosaic (Dot-mounted)</b> (1-15/16" X 3-15/16") (5.1 cm x 10.5 cm)	<b>2 x 4 Brickwork Mosaic (Dot-mounted)</b> (1-15/16" X 3-15/16") (5.1 cm x 10.5 cm)	<b>1" Hexagon Mosaic (Dot-mounted)</b> (15/16" x 15/16") (2.5 cm x 2.5 cm)

All Unglazed Mosaics are dot-mounted on 12" x 24" sheets. Master-set® back edge mounting system.  
For pool installations, Unglazed Mosaics are available in ClearFace mount film. Contact your sales representative for more information.

	Low (V1) Solid	to		High (V3) Speckled
<b>Tile Thickness:</b> 1/4" (5/16" for 2 x 4 mosaic)				
<b>Recommended Grout Joint:</b> 1/8" Approximately				
<b>Pricing:</b> Medium				

## PERFORMANCE CHARACTERISTICS

	Dynamic C.O.F. Wet	Static C.O.F. Wet	Static C.O.F. Dry	Moisture Absorption	Breaking Strength	MOH's	Chemical Resistance
Non-Abrasive	≥ 0.42	≥ 0.60	≥ 0.70	0.01%-0.5%	> 300 lbs.	7.0 - 8.0	Resistant
Abrasive	> 0.42	≥ 0.70	≥ 0.80	0.01%-0.5%	> 300 lbs.	7.0 - 8.0	Resistant

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. For more information, visit our website at [www.americanolean.com/DCOF](http://www.americanolean.com/DCOF).

### Cleaning Procedures

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for porcelain tile
- Remove cleaning solution with a clean, damp sponge or mop

### Installation Methods Backing Materials

- Concrete
- Exterior grade plywood
- Cementitious backer board

### Setting

- Latex modified dry-set mortar
- Epoxy

### Grouting

- Sanded grout
- Sanded cement grout
- Epoxy grout

## APPLICATION

	INTERIOR			EXTERIOR	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors/Patios: Covered & Uncovered	●	●	●	●	●
Walls/ Backsplashes	●	●	●	●	●
Countertops	●	●	●	●	●
Pool Linings	●	●	●	●	●
Pool Deckings	●	●	●	●	●

Suitable for exterior walls and floors in freezing and non-freezing climates when proper installation methods are followed.

Not for use on ramps.

## NOTES

Since there is shade variation in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.

For additional information, refer to Factors to Consider at <http://americanolean.com/factors-to-consider.cfm>.



All or select items within this series are Made in the USA, please visit <http://americanolean.com> for more information.

AMERICAN OLEAN®  
FREEDOM OF EXPRESSION™

[americanolean.com](http://americanolean.com)

888.AOT.TILE